


Assembly instruction of service arm and cable feed for Red 5




Insert the service arm and cable feed together with the tube into the bush and secure with the retaining ring.

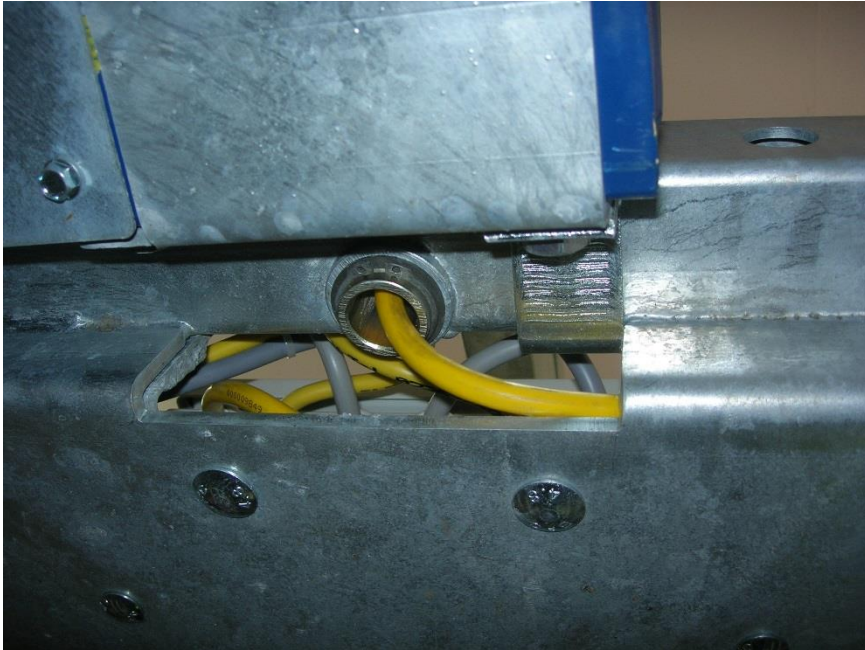

Install cable for service arm as shown in the photo



Secure cable with additional cable ties

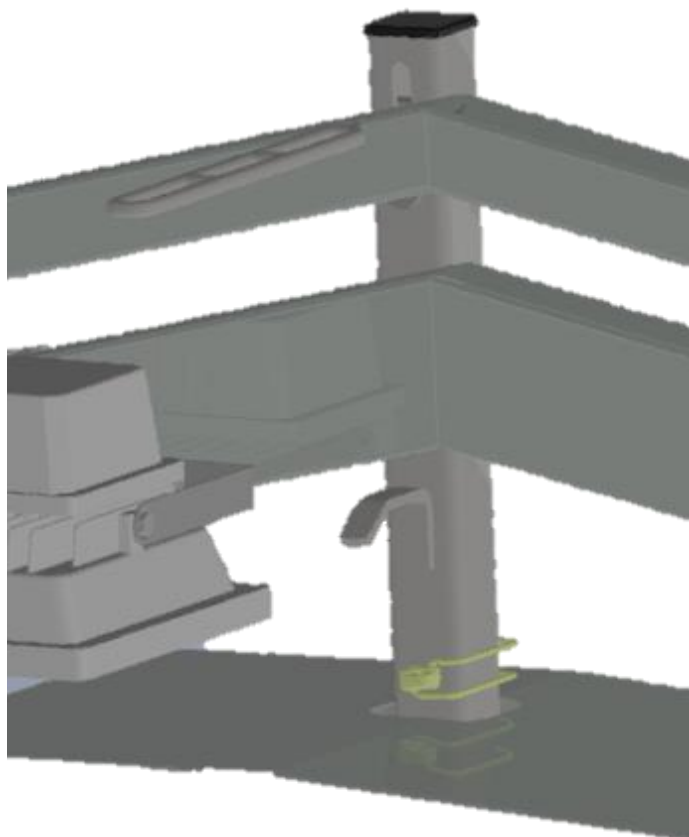

Place the service arm stop onto the molded tube as shown above and lock the locking pin into position – use elastic band for securing the service arm cable feed.